

BEZILLO®

SUPERIOR QUALITY PRODUCTS.

PROSHIELD ELITE 909








BEZILLO PROSHIELD ELITE 909

PRODUCT DESCRIPTION

ELITE 909 penetrates the surface of the stone creating an invisible barrier against moisture and rising humidity and protection against stains: oil, grease, coffee, tea, food, general dirt, smog, mould and mildew. Product will not change the natural aspect of the stone or create any type of film, allowing permeability vapour moisture to escape, and is UV- resistant. Some natural stones (marble, limestone) will remain sensitive to acidic etching.

- Suitable for marble, granite, slate, sandstone, quartz, volcanic stones, concrete, cement, terra cotta, natural and artificial engineered stones.
- Effective for interior and exterior use.
- Odorless.
- Ideal for floors, kitchen tops , stairs, tables, bathroom tops and shelves.

ADVANTAGES

-  ... Superior quality solvent based penetrating sealer
-  ... Effectively seals and protects all natural stones, engineered quartz etc
-  ... Ready to use
-  ... Does not alter the natural look of the stone surface
-  ... Used by professionals

DISCLAIMER

This information is true and accurate to the best of our knowledge and belief, but since the circumstances of use and any labour required are out of our control, the end user must verify beforehand that the product is appropriate for his particular application. No responsibility can be accepted, and no warranty can be provided by our Representatives, Agents, or Distributors. The end user should make sure he has read our most recent material and that the products are sold in accordance with our Standard Conditions of Sale.

PACKAGING


- 10 x 1 L bottle
- 2 x 5 L tank
- 1 x 25 L tank
- 10 x 200 ml bottle
- 10 x 500 ml bottle

All childproof tamper evident cap.

COVERAGE

Indicative coverage allowing 2 coats subject to stone asorption, surface texture.

- High Porosity Stone, Sandstone: 5 - 8 m²
- Medium Porosity, Honed Stone, Limestone 10 – 20m²
- Low Porosity, Polished Stone 20 – 25m²
- Very Dense Stone 25 – 30m²

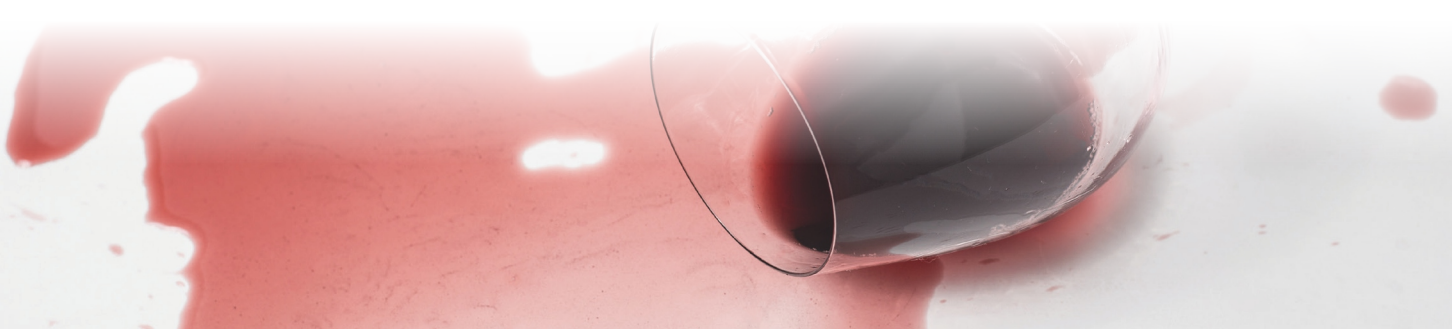

BEZILLO PROSHIELD ELITE 909

TECHNICAL DATA SHEET

APPLICATION

All stone surfaces to be treated must be completely clean and dry. Apply ELITE 909 with roller, brush or by spraying. Remove any excess product. Apply one coat of ELITE 909 evenly by spraying using a low pressure pump up garden spray type unit or with a lamb's wool applicator or by cloth in circular movements (for work tops). The most efficient method is by spraying. On very absorbent surfaces apply a second coat allowing sufficient time for your first application to penetrate into the stone and dry.

TEMPERATURE


Temperature of surface to be treated should not be below 10°C. Avoid direct sunlight especially for external works.

IMPORTANT SAFETY NOTE

When using any type of solvent based product suitable ventilation should be provided during and after application. Use appropriate rubber gloves where necessary and do not smoke, eat or drink while using product. Keep product well closed and out of the reach from children. Additional information available on the MSDS SHEET (Material Safety Data Sheet).

ADVICE

- On treated surfaces do not apply alcohol and solvent
- Keep product in cool and dry surroundings.
- Use appropriate rubber gloves where necessary and do not smoke, eat or drink while using product.

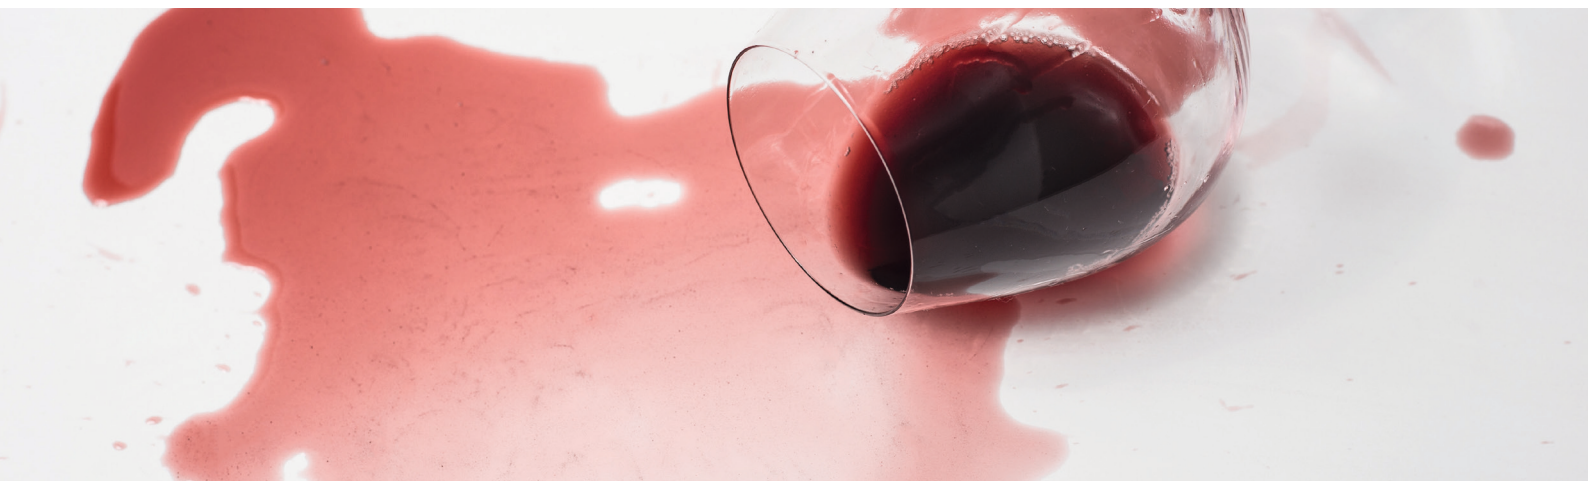


BEZILLO PROSHIELD ELITE 909

TECHNICAL DATA SHEET

WARRANTY

The technical advice whether verbal or in writing or by way of trials are given in good faith but without warranty. The application use or processing of the products are beyond our control and should be tested for their suitability and therefore your own responsibility. In no event shall BETON STONE SOLUTIONS be liable to the customer or anyone else for incidental or consequential damages, however occasioned.

ALWAYS TEST FIRST

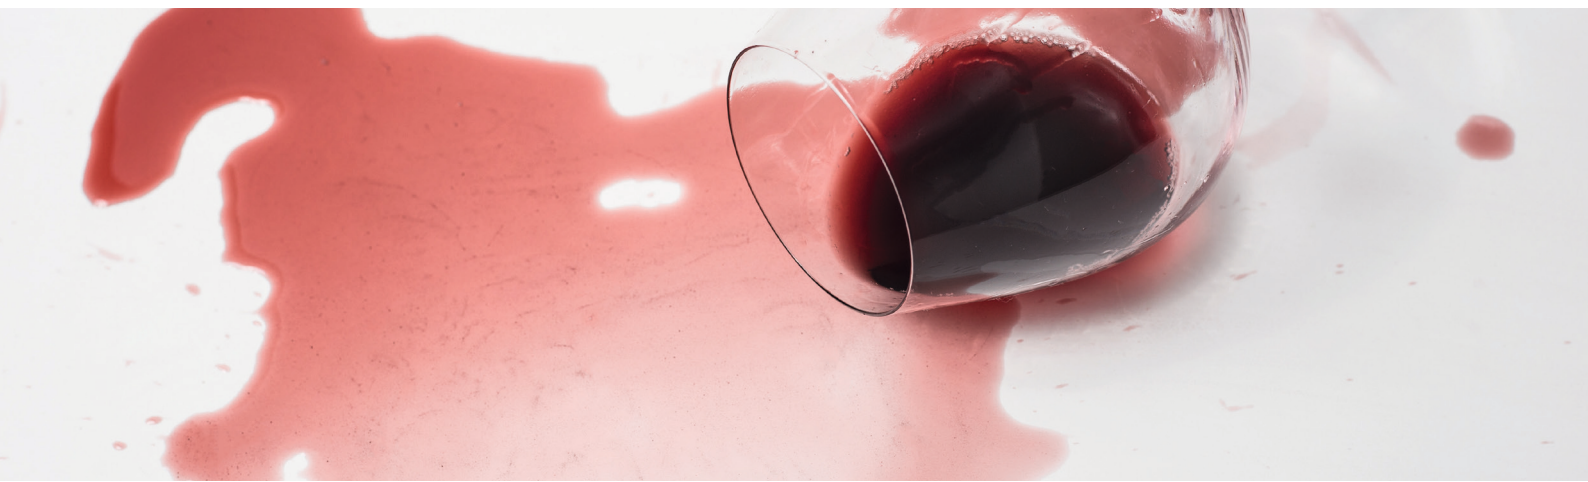



EXPERIENCE THE DIFFERENCE!!

BETON STONE SOLUTIONS INDIA PVT LTD

+91 99301 28291 / +91 83286 36546

info@betonstonesolutions.com | www.betonstonesolutions.com

HEAD OFFICE - INDIA

B/2, Amrat Niwas, 15th
Sarojini Road, Ville Parle
(W), Mumbai - 400056, India.

REGIONAL OFFICE - INDIA

Plot No.18, Saibabanagar
Colony, Tellapur, R.C. Puram,
Sangareddy, Hyderabad, India.

ITALY OFFICE

Via Monte Cengio,
11/0 36073, Cornedo
Vicentino (VI) Italy.

DUBAI OFFICE

P.O. Box
239697,
Dubai UAE.